

COMMERCIAL DOOR & FRAME - ORDER GUIDE

Customer / Project Information:

Customer Name _____
 Customer Email _____
 Customer Phone #: _____

Job Name: _____
 Job Address: _____

DOOR


All measurements should be to 1/16 inch

Door Type: Wood Metal Fiberglass (FRP) **Door Location:** _____
 Single Pair Interior Exterior
 Door Details: Flush Lite Kit Louvers **Door Additions:** Mullion Astragal
 Fire Rating: No 20 min 45 min 60 min 90 min 3 hr
 Door Species: Oak Birch No Preference Other _____
 Door Finish: _____

DOOR MEASUREMENTS


Door Width **A** _____ Door Height **B** _____
 Undercut bottom: _____ Undercut top: _____
 Swing: LH RH LHR RHR (see diagram on pg 2)
 Bevel Lock Side **Y / N** _____
 Top of Door to Centerline of latch _____
 Top of Door to Centerline of lock _____

Hinge Type: STD / HD / NRP / Other _____
 Hinge Size: _____
 Hinge corners: Square Radius
 Hinge Backset: _____

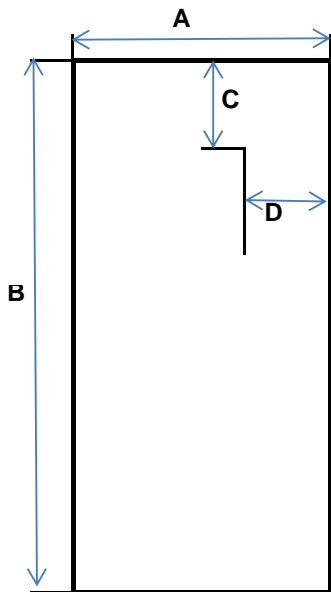

LITE KIT: Wood Metal
Visible glass dimensions
 Width _____
 Height _____
 Top of door to cut out **C** _____
 Edge of door to cut out **D** _____
 Glass Thickness _____
 Glass Type
 tempered/laminated/insulated
 fire glass (take photo of tag)
 Glass stop side _____

Hinge Measurement: Top of door to top of hinge

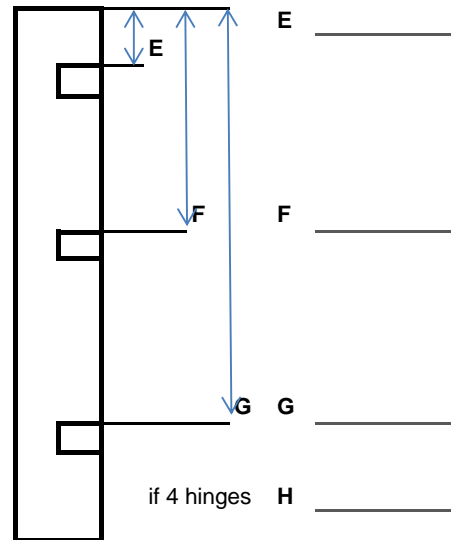

COMMERCIAL DOOR & FRAME - ORDER GUIDE

DOOR HARDWARE

LOCK Manufacturer: _____
 Model: _____
 Finish: _____
 Bore Backset: 2 3/4 2 3/8

LOCK PREP 161 Prep Mortise Prep
 Measure top of door to top of mortise _____
 Mortise Width _____ Mortise Depth _____

CLOSER Yes No
 Manufacturer: _____
 Model: _____
 Mount: Push Side ___ or Pull Side ___ Hold Open? Y / N

SMOKE GASKET Yes No
WEATHER STRIPPING Yes No
THRESHOLD Yes No
 Threshold height: _____
 Door Thickness: _____

DOOR STOP Yes No
 Floor Wall


PANIC TRIM Yes No

ADDITIONAL HARDWARE

Deadbolt Push-Pull Set Latch Guard Other _____
 Kickplate Sweep Drip-cap _____
 Viewer Signage Flush-bolts
 Surface-bolts Continuous Hinge

ELECTRONICS


DPS Maglock EPT Elec Hinge Auto Operator
(actuator Wired or ...)
 Delayed Egress Mag Hold-Open REX on Wall REX in Lock REX in Panic
 Power Supply Raceway Conduit Electric Strike

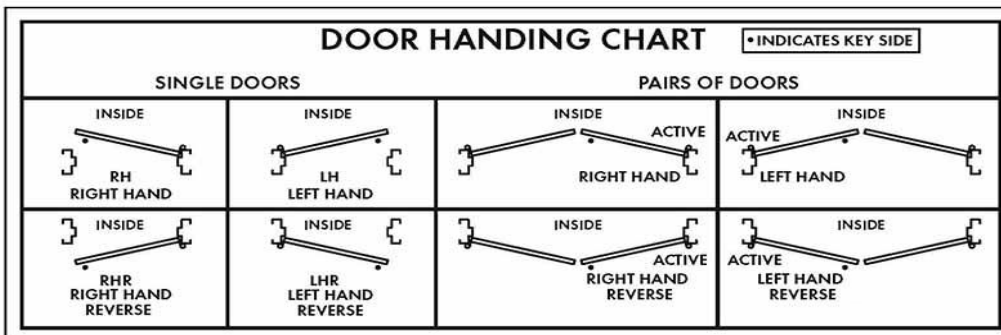

COMMERCIAL DOOR & FRAME - ORDER GUIDE

FRAME

ROUGH OPENING MEASUREMENTS

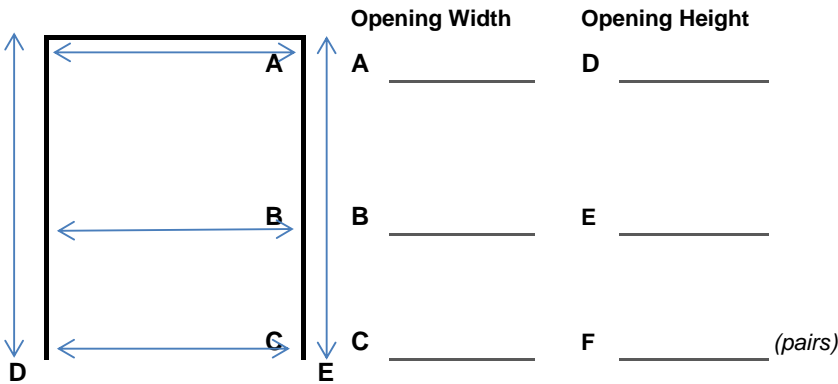

FRAME TYPE
 KD (knock-down) Welded

WALL TYPE _____

WALL THICKNESS _____

Note: For KD Frames - measure outside dimensions of frame

ANCHORS:

FRAME HEAD: 2" 4" Special _____

FRAME HINGE & STRIKE 2" Special _____

FRAME HINGE LOCATIONS:

Top of inside frame opening to top of hinge:
 TOP _____ MIDDLE _____ BOTTOM _____

STRIKE: Frame top to center line of strike _____

SIDLIGHTS: Yes No

Sidelight bottom sill: 2" 4"
 Other _____

Sidelight Glass Size: _____

Sidelight Glass Thickness: _____

Sidelight Glass Style: Tempered
 Laminated
 Insulated
 Other _____

PICTURES NEEDED OF OPENING

- Push side
- Pull side
- Threshold
- Top of Door
- Questionable items

Please remember that all measurements should be exact to the 1/16 inch.

NOTES: